

KEY FEATURES

Microsoft® Windows Mobile™ software

Rugged and dependable

Versatile—use with every sensor and application



THE HANDHELD CONTROLLER MADE EXTRA RUGGED FOR DATA COLLECTION

The Trimble® Recon® controller is a rugged handheld data collector designed for use in the field. Featuring a touch screen for quick and easy data entry and a color graphic display for image and data files, the Trimble Recon controller running Trimble field software is an excellent partner for fieldwork. It will tackle multiple surveying applications, including topographic surveying, high-accuracy GIS, engineering, construction, and mapping.

MADE FOR THE FIELD

When field conditions are tough, the Trimble Recon controller works as hard as you do. Not only is it lightweight and rugged—exceeding military specifications for drop, vibration, immersion, and operating temperatures—it also features a powerful battery to ensure maximum productivity through minimum downtime. The Trimble Recon controller will work all day and longer without a change of battery.

For extra-long days, you can extend the controller's data storage space using its two CompactFlash slots.

FLEXIBLE, ADAPTABLE, AND MODERN

The Trimble Recon controller is a data-collection solution designed to keep up with developing mobile technologies. With its powerful 400 MHz Intel® Xscale processor and 256 MB of robust, high-performance flash memory, the Trimble Recon controller gives you the flexibility to adapt to your specific needs and applications. Microsoft Windows Mobile 5.0 software runs all Microsoft applications familiar to you from the office, including mobile versions of Outlook, Word, Excel, and PowerPoint.

When the Bluetooth® kit is used, the Trimble Recon controller also supports wireless communications with the Trimble R8 and 5800 GPS systems.

TRIMBLE RECON CONTROLLER

TECHNICAL SPECIFICATIONS

Standard software

Microsoft Windows Mobile 5.0 software programs including:

- Internet Explorer Mobile
- File Explorer
- Word Mobile
- Excel Mobile
- PowerPoint Mobile
- Outlook Mobile
- Microsoft Windows Media™ Player
- Microsoft ActiveSync®
- Microsoft Pictures & Videos
- Calendar, Contacts, Notes, Tasks, Calculator
- Online Help

HARDWARE

Physical

Size 16.5 cm x 9.5 cm x 4.5 cm (6.5 in x 3.75 in x 1.75 in)
Weight 0.49 kg (17 oz) with rechargeable PowerBoot module
Memory 64 MB high-speed SDRAM, ~22 MB reserved
Onboard non-volatile NAND Flash
(256 MB internal Flash disk, ~31 MB reserved)
Expandable Memory CompactFlash (CF) card
Processor 400 MHz Intel PXA255 XScale CPU
Power NiMH rechargeable pack, 3800 mAh,
battery life of 15 hours under normal operating conditions¹

ENVIRONMENTAL

Temperature

Operating temperature -30 °C to +60 °C (-22 °F to +140 °F)

Storage temperature -40 °C to +70 °C (-40 °F to +158 °F)

Humidity MIL-STD-810F, Method 507.4

Sand and Dust IP6X, MIL-STD-810F, Method 510.4, Procedure I

Water IPX7, sealed against accidental immersion
(1 m for 30 minutes) MIL-STD-810F, Method 512.4, Procedure I

Drop MIL-STD-810F, Method 516.5, Procedure IV;
26 drops from 1.22 m (4 ft) onto plywood over concrete
6 additional drops at -30 °C (-22 °F)
6 additional drops at +60 °C (+140 °F)

Vibration MIL-STD-810F, Method 514.5, Procedure I (Fig. 17) & II

Altitude MIL-STD-810F, Method 500.4
Procedures I, II and III; 4572 m (15,000 ft) at +23 °C (+73 °F)

INTERFACE

Display 240 x 320 pixel (QVGA) color TFT with LED front light,
daylight readable touchscreen

Keyboard 10 hardware control keys, Soft Input Panel (SIP)
virtual keyboard and transcriber software

Audio Integrated speaker and microphone for
audio system events, warnings and notifications

Operating System Microsoft Windows Mobile 5.0

INPUT/ OUTPUT

Ports RS232 9-pin serial port, USB port, DC Power Port

Expansion 1 x Type I and 1 x Type II CompactFlash card slots

STANDARD ACCESSORIES

- Rechargeable PowerBoot module
- Standard CF-Cap™
- International AC recharger (100 V–240 V)
- USB data cable
- Hand strap
- 2 stylus pens
- 10 screen protectors

CERTIFICATION

Class B Part 15 FCC certification, CE Mark approval and C-tick approval.
Bluetooth type approvals and regulations are country specific.


RECYCLING INFORMATION

For product recycling instructions and more information, please go to
www.trimble.com/environment/summary.html.

© 2003–2007, Trimble Navigation Limited. All rights reserved. Trimble, the Globe & Triangle logo, and Recon are trademarks of Trimble Navigation Limited, registered in the United States and in other countries. CF-Cap is a trademark of Trimble Navigation Limited. The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Trimble Navigation Limited is used under license. ActiveSync, Microsoft, Windows Media, and Windows Mobile are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners. PN 022543-047D (05/07)

¹ No backlight, moderate temperature, no high-power-consuming CompactFlash cards.

Specifications subject to change without notice.

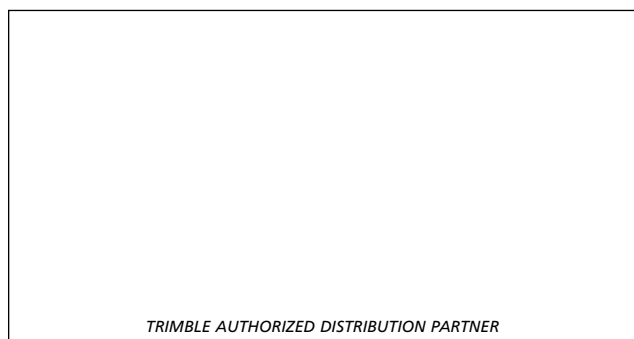

NORTH AMERICA

Trimble Engineering &
Construction Group
5475 Kellenburger Road
Dayton, Ohio 45424-1099 • USA
800-538-7800 (Toll Free)
+1-937-245-5154 Phone
+1-937-233-9441 Fax

EUROPE

Trimble GmbH
Am Prime Parc 11
65479 Raunheim • GERMANY
+49-6142-2100-0 Phone
+49-6142-2100-550 Fax

ASIA-PACIFIC

Trimble Navigation
Singapore Pty Limited
80 Marine Parade Road
#22-06, Parkway Parade
Singapore 4492699 • SINGAPORE
+65-6348-2212 Phone
+65-6348-2232 Fax



www.trimble.com